
Wyre Forest District Council

Park Lane, Kidderminster Public Realm Framework

Final Report - June 2006



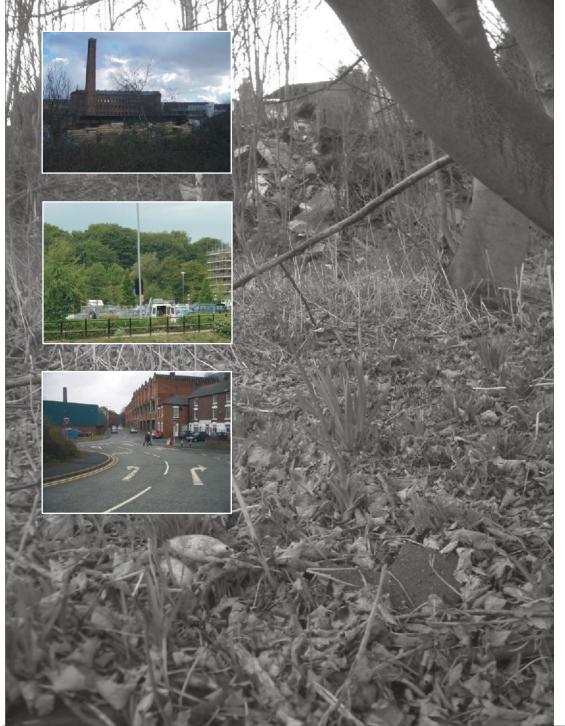

taylor youngity

architecture
graphics
healthcare planning
interior design
landscape architecture
regeneration
town planning
urban design

Contents

| | | Page |
|----|---|------|
| 1. | Introduction | 1 |
| 2. | History | 2 |
| 3. | Landscape / Townscape Audit | 4 |
| 4. | Movement and Linkages | 7 |
| 5. | Public Realm and Open Space Audit | 9 |
| 6. | Park Lane Wooded Greenspace – General Description | 12 |
| 7. | Vision | 16 |
| 8. | Park Design | 18 |
| 9. | Timber Yard Residential Area and Related Open Space | 22 |
| 10 | Northern Entrance to Park Lane and the Rock Works | 27 |
| 11 | Street Layout | 29 |
| 12 | Design Palette | 28 |
| 13 | Implementation | 32 |
| | Appendix A – Cost Estimates | 36 |

Contact: Ken Harrison, Forward Planning, Wyre Forest Distric Council, Duke House, Clensmore Street, Kidderminster, Worcs. DY10 2JX

Document :Final Report Compiled By: DMK Reviewed By: PC Date: 07.06.06





Taylor Young Vanilla Factory 39 Fleet Street Liverpool L1 4AR

Tel: 0151 702 6500 Fax: 0151 702 6509

Email: urban@tayloryoung.co.uk

1. Introduction

- 1.1. Wyre Forest DC (W.F.D.C.) are looking to manage the change earmarked for the Park Lane area where there is currently a barrier between the town centre and the adjacent Park Street residential area. The barrier currently consists of the following elements:
 - The canal (with no bridge);
 - Industrial and derelict land;
 - Semi-industrial road;
 - Despoiled greenspace; and
 - Steep, sloping topography.
- 1.2. The barrier caused by the canal can be transformed by constructing a bridge, uniting the town centre with the Park Street area above. The elements of the bridge would be:
 - The canal with a new footbridge;
 - · Attractive waterside housing;
 - Uplifting and traffic calmed streetscape;
 - A small town park;
 - Carefully thought through, safe and accessible network of paths through the park linking proposed development to the canal and town centre.
- 1.3. A starting point for this process was 'Taking Nature to Heart' which identifies the site and defined some parameters for it. The next step in the process is a framework comprising:
 - proposals to create safe access to the proposed park;
 - · sketch design and concepts for the park;
 - streetscape design along Park Lane; and
 - implementation strategy including cost estimates.
- 1.4. A design code will apply to street furniture, surface materials, the footbridge and boundary treatments, to provide a consistent and coordinated approach to the public realm design. The expectation is for the preparation of a palette of materials and treatments to compliment this part of the town's intrinsic character, linking the canal-side area of new housing, the town park and the existing housing above.
- 1.5. The implementation strategy outlines the survey's that need to be undertaken to inform more detailed design and cost estimates. Proposals for the park are presented in a modular fashion as phased options that can be tailored to strategic proposals, resources and timescale.

2. History

- 2.1. Park Lane is the historic boundary of the Dear Park that wrapped around the western side of Kidderminster. Park Lane was the main road to Stourport up until the New Road was built in 1830.
- 2.2. The Staffordshire and Worcestershire Canal runs parallel to Park Lane, it was opened in 1772, built by engineer James Brindley as part of his Grand Cross plan for waterways connecting Hull, Liverpool and Bristol.
- 2.3. Four historic maps were supplied for the study area dated; 1884, 1903, 1926 and 1939 (see Figures 2.1-2.4).
- 2.4. The wooded greenspace to the west of Park Lane on the steeply sloping, overgrown ground was historically wooded in its central section, but its northern section had a row of terraced houses built, parallel to Park Lane, in the 19th century midway up the slope. This terrace of housing was accessed by a ramped roadway leaving Park Lane at the Rock Works. The houses are still shown on the map of 1939. Four properties are also shown at the southern end of the greenspace. There may be contamination issues relating to these built elements and any public access.
- 2.5. The map of 1884 shows a glue works on part of the greenspace which may have contamination issues with respect to any public access.
- 2.6. The northwest boundary of the greenspace is formed by an old 3-4m high brick retaining wall into which is built a number of low vaulted ceiling storage areas which were accessed from the terrace of housing by a further ramped roadway.
- 2.7. The existing timber yard area is shown as a timber yard or saw mill on all of the historic maps, though an Iron Foundry is shown on a central portion of the site. There may be contaminations issues with the reuse of these areas.
- 2.8. Weavers Wharf included the original site of the Brinton's carpet factory. When it was redeveloped (completed in 2004) into a retail park with a large Tesco anchor store, the historic engine house, its chimney and Slingfield Mill were renovated and formed a focal part of the new development, the Piano Building is presently undergoing renovation as part of a mixed use development.

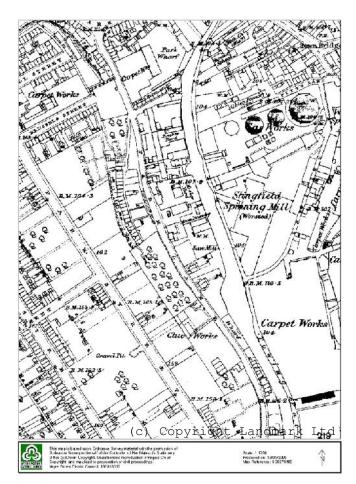


Figure 2.1 - 1884 Map

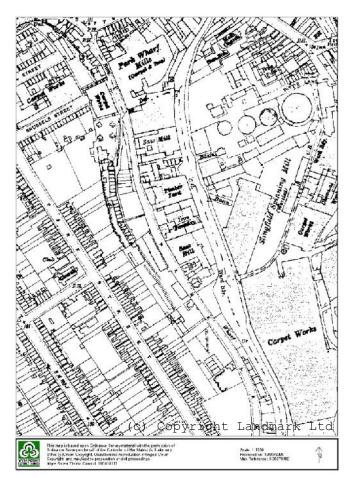


Figure 2.3 - 1926 Map

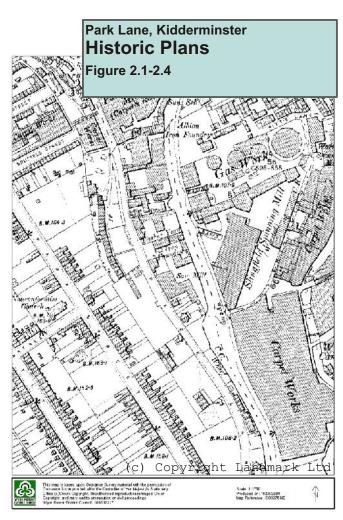


Figure 2.2 - 1903 Map

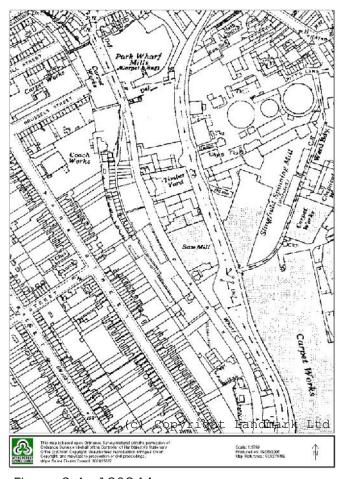


Figure 2.4 - 1939 Map

3. Landscape / Townscape Audit

- 3.1. There is a strong north-south orientation to this area dictated by the River Stour and the Staffordshire and Worcestershire Canal which divide the Town Centre from the western residential suburbs. Between the Canal and the River sits a recently constructed retail park, Weaver's Wharf, on the site of the Brinton's Carpet works (See Figure 3.1 and Photos 3.1 to 3.6).
- 3.2. The Park Lane area lies to the west of the canal forming a long narrow strip. To the west of Park Lane is a steeply sloping wooded green space. To the north of this is the Rock Works and a number of smaller historic buildings built on the scarp slope. The Rock Works is a 3 storey, attractive, historic disused carpet factory built on a plot of land created by excavating the rock face, the northern section of which was added in 1927. Above the wooded greenspace and the Rock Works lies the Park Street residential area consisting of rows of Victorian Terraces backing onto the greenspace. The north of Park Street is an industrial estate.
- 3.3. Between Park Lane and the canal to the east, the land is flat and occupied predominately by the timber yard. To the south of this stretch of land is a short run of historic terrace houses and some older commercial units. To the north is Matalan, an anonymous portal frame building with limited associated parking.
- 3.4. The timber yard consists of; an open area for storage and vehicle manoeuvring, a relatively recent portal frame building, an attractive, historic three floor factory building bordering Park Lane and historic factory units bordering the canal. There is an electrical sub-station to the south of the timber yard.
- 3.5. The chimney to the Weaver's Wharf engine house is one of the most prominent landmarks in Kidderminster followed closely by the adjacent Slingfield Mill and Piano Building. Together these form a sub-area of real quality within the retail park looking out across the canal to the timber yard.
- 3.6. The bus station lies to the west of the Piano Building. An axial pedestrian link has been created running down the southern end of Slingfield Mill to the canal with a strong visual connections to the timber yard and Park Lane wooded greenspace beyond.

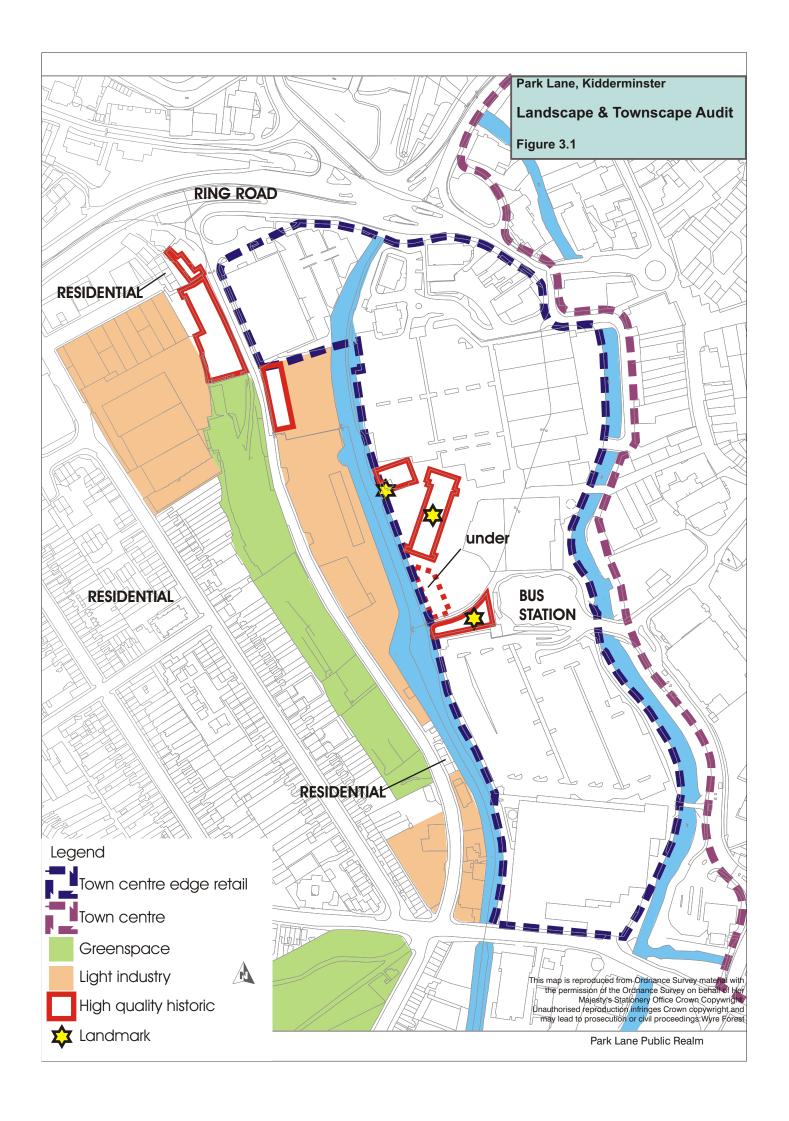




Photo 3.1 - Wooded Open Space



Photo 3.3 - Timber Yard, Canal, Tow Path and Canal Square

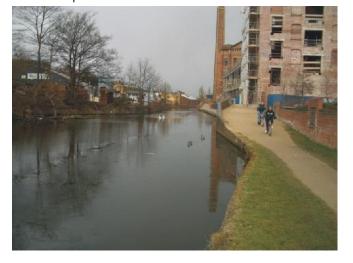


Photo 3.5 - Engine House Chimney Landmark



Photo 3.2 - Park Lane looking south




Photo 3.4 - Northern End of Park Lane



Photo 3.6 - Park Street

4. Movement and Linkages

- 4.1. Park Lane forms the spine of the study area (see Figure 4.1) and runs north-south linking the ring road to Castle Road, the land in the study area is along the alignment of the original proposals to complete the ring road and is often used as a rat-run. The road is approximately 7m wide. A path runs the length of Park Lane on its eastern side, only the southern half of the western side has a footpath.
- 4.2. The ring-road feeds Park Lane to the north via a slip road which only allows traffic to exit the ring road, but not to access it. The slip road forms a tight curve as it enters the top end of Park Lane at a give-way junction.
- 4.3. A major artery of the canal system the Staffordshire and Worcestershire Canal runs north-south between Weavers Wharf and Park Lane. The tow path on the eastern bank is an important local and strategic foot/cycle path, there is no tow path or public access to the western bank. The River Stour is not navigable on this stretch and lacks foot or cycle access along its length. There is no pedestrian bridge on the canal between the ring-road and Castle Road and the two waterways plus the presences of the steep scarp slope up to Park Street with no through access, combine to create a near insurmountable barrier to direct east-west movement between the town centre and the Park Street area. Access can be gained to the north via the ring-road and to the south along Castle Road.
- 4.4. There is a historic, overgrown ramped access to the wooded greenspace from the Rock Works, this has recently been fenced off. A second access point to the greenspace is located opposite the Timber yard building, this is also fenced off. Historically there existed a stepped access in the northwest corner of the greenspace linking to Park Street, but this is no longer in use or accessible, the steps are in disrepair. There is a barely discernable, informal path along the central terrace of the greenspace.
- 4.5. Pedestrian access to the north is very poor. The ring-road forms a formidable barrier to movement which is only negotiable via steps ramps and underpasses. A long flight of steps run up past the northern end of the Rock Works to link Park Lane to Park Street, but they are a daunting prospect even to the most active.

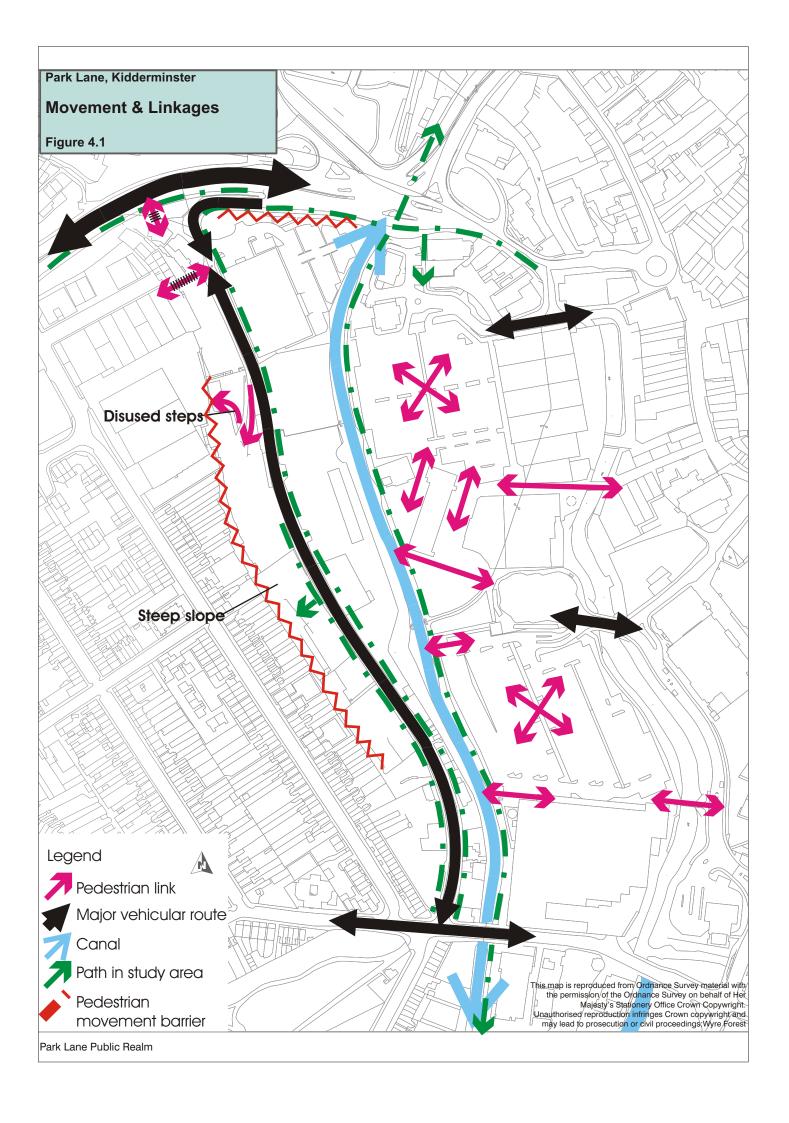


5. Public Realm and Open Space Audit

- 5.1. The largest pieces of open space or public realm in the study area are;
 - The Canal,
 - The River.
 - The Car Parks associated with the retail units
 - The Wooded Greenspace
 - Kidderminster Cemetery

These spaces, shown on Figure 5.1, reinforce the north-south orientation of the area and make east-west links difficult to achieve.

- 5.2. Slingfield Mill has a number of significant piece of public realm surrounding it.
 - To the west is Canal Square, a block paved triangular space with a sunken amphitheatre (see Photo 5.1) with the Engine House restaurant overlooking it. This space is bound on its western side by the canal. Mooring line the canal at this point and the tow path rises up adjacent to the Engine House to negotiate an historic tunnel linking the canal to a basin (now filled in) on Weaver's Wharf. The open western aspect means this space gets good afternoon and evening sun.
 - To the east of Slingfield Mill is the Market Square, a rectangular space originally built as part of the Weaver's Wharf development.
 - There is an axial link along the southern end of Slingfield Mill between the Bus Station and the canal. A semi circular space opens up on this axis and is known as the Circus.
 - A second axial link aligns with the north-eastern corner of Slingfield Mill and is a main route across the Stour to the town's retail core
- 5.3. The spaces around Slingfield Mill are currently under-used particularly in the evenings. The restaurant in the Engine House is isolated and not significant enough on its own to draw many people beyond Slingfield Mill to the Canal Square. Slingfield Mill does not have an active frontage on Canal Square and the area is dominated by retail uses. The Piano Building development should significantly improve the area by locating a residential population in its heart and creating more ground floor animation.
- 5.4. Together the formidable grouping of Slingfield Mill, the Piano Building and the Engine House tend to form a barrier between the town centre and the canal with Canal Square hidden behind the Mill buildings standing amongst a sea of car parking. These dramatic buildings, their setting adjacent to the canal and the spaces around them offer an opportunity to create a key focal area in the town of a quality not found at present but this will require a change in the area surrounding Canal Square, a change in ground floor uses, building relationships to spaces and an improvement to the quality of, or interest in the axial links to the town centre.

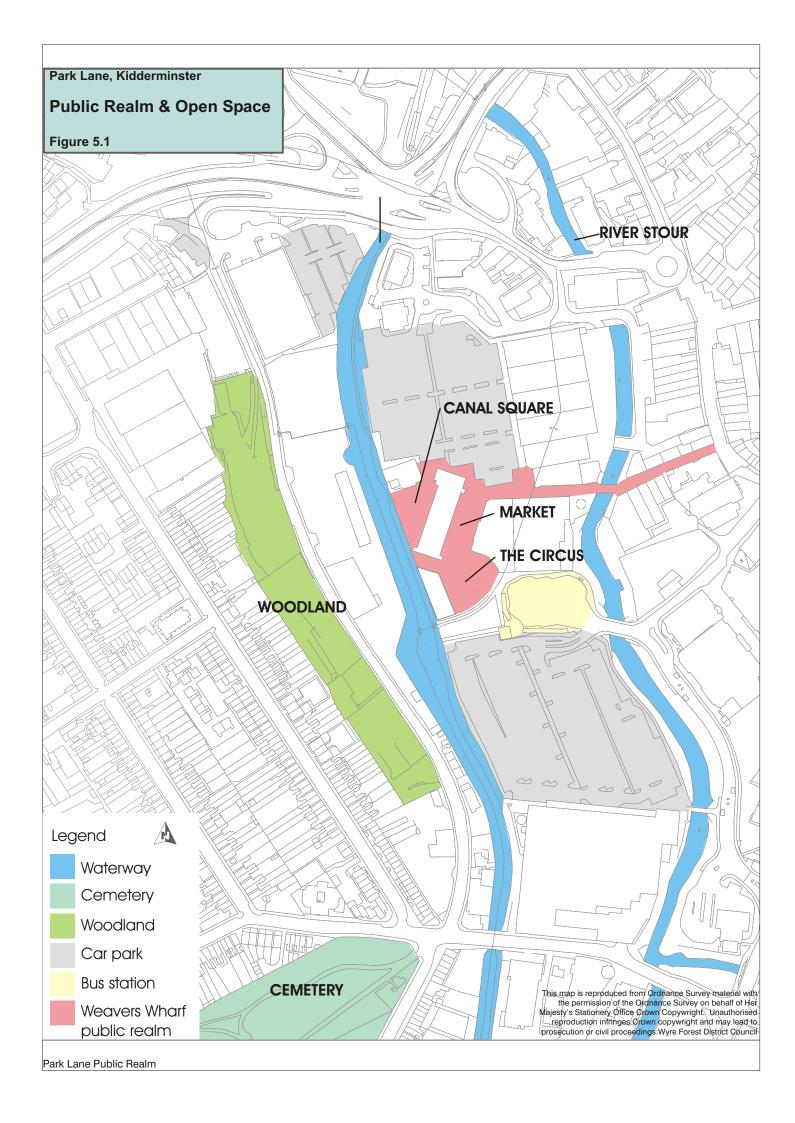

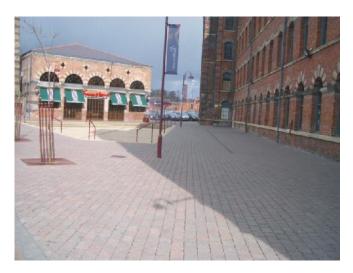


Photo 5.1 - Canal Square



Photo 5.3 - The Circus and axis to Bus Station, remainder of circus part of Piano Bldg development presently under construction.



Photo 6.2 - Southern end of Park Lane and the wooded greenspace looking north.



Photo 5.2 - Market Square




Photo 6.1 - Views over Slingfield Mill from the wooded greenspace



Photo 6.3 - Park Lane to the south of the Rock Works with base of ramped access to wooded greenspace on the right

6. Park Lane Wooded Greenspace – General Description

- 6.1. The greenspace (see Photos 6.1 to 6.15) to the west of Park Lane is a very steeply sloping site (see Figure 6.1) with levels to the east approximately 16m lower than those to the west. The average width of the open space is approximately 40m, so this gives an average gradient of 1:2.5. This facilitates good views over the town centre.
- 6.2. Most of this level difference is taken up by steep embankment, but there are significant brick retaining walls generally in a very poor state of repair as follows:
 - along the length of Park Lane (height ranges from 0.75-1.5m)
 - around the north western perimeter of the area(height ranges from 3-5m)
 - internal retaining walls in the northern third of the area (height up to 3m)
 - southern boundary wall (height ranges from 2m-10m)
- 6.3. At the northern end of the western boundary, there is also a stretch of red sandstone cliff between 3 and 4m in height
- 6.4. Recently, a galvanized steel palisade fence has been erected along the Park Lane boundary to secure the area
- 6.5. Historically the open space area had a terrace of houses running centrally in a north-south orientation. This terrace (now demolished) has created a level area varying in width from 5-20m. This terrace was accessed by a ramped roadway (approx. 5m wide) from the north-eastern corner of the area onto Park Lane.
- 6.6. The north-western corner of the open space has two level areas where building were historically located, there are interesting features recessed into the boundary retaining walls and sandstone cliffs. These are connected to the area where the terraced houses used to stand by overgrown ramped roadways.
- 6.7. The open space is generally well wooded, predominantly self-seeded sycamore and ash. There is a good semi-mature covering with many young trees and saplings coming through. Brambles cover most of the under storey and ivy covers many of the trees. Bluebells were seen to be coming through in areas without brambles.
- 6.8. There are two access points to the open space from Park Lane, both are currently secured. The ramped access from the north-eastern corner mentioned above and a pedestrian gate opposite the modern timber yard portal frame building. There is a further access in the north-western corner of the site via a set of crumbling steps to the private land of some factory units on Park Street. At present it is not possible to achieve a east-west through route across the open space.
- 6.9. As well as the highly visible fly-tipping on the upper slopes of the wooded greenspace, there is a significant probability of contamination from historic use of the site either in the area where the housing previously stood, or in the area opposite the more recent timber yard portal frame building, where the map of 1884 indicates the location of a Glue Works.

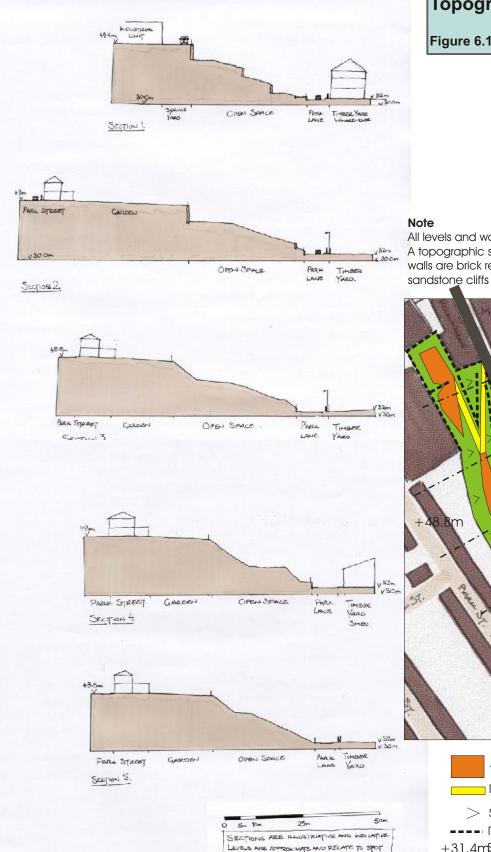


HEIGHTS FROM OS DATA ON PARK STREET AND THE CAMALSIDE

Park Lane, Kidderminster **Topography**

Figure 6.1

All levels and wall locations are indicative. A topographic survey is required. Most of the walls are brick retaining walls, some are

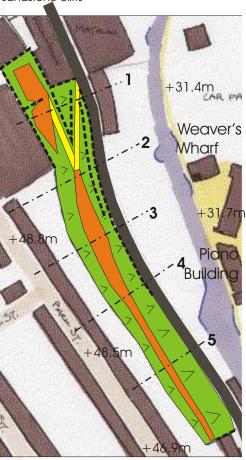

Area of Generally Level Ground

Ramp

> Steep Slope

--- Retaining Walls

+31.4m\$pot Level from O.\$. Data

This map is reproduced from Ordnance Survey material with the permission of the Ordnance Survey on behalf of Her Majesty's Stationery Office Crown Copywright. Unauthorised reproduction infringes Crown copywright and may lead to prosecution or civil proceedings:Wyre

Park Lane Public Realm

Park Lane, Kidderminster **Greenspace**

Photos 6.4 to 6.9



Photo 6.4 - Fly-tipping from houses on wonspace



Photo 6.6 - Lush summer vegetation



Photo 6.8 - Sandstone Cliffs in north west corner of wooded greenspace



Photo 6.5 - Stepped access to industrial units on Park Street in disrepair



Photo 6.7 - Wooded skyline encloses the town centre. View over the Stour



Photo 6.9 - Retaining wall of variable height and quality. End of footpath on west side of Park Lane.

Park Lane, Kidderminster **Greenspace**

Photos 6.10 to 6.15



Photo 6.10 - Rear of houses on Park Street



Photo 6.12 - Plateau area in middle of wooded greenspace



Photo 6.14 - High retaining wall adjacent to new apartments requires structural survey. Need to consider relationship with neighbouring sites.



Photo 6.11 - Fly-tipping at rear of Park Street houses



Photo 6.13 - Views over timber yard to St Mary's Church




Photo 6.15 - Emerging ground flora in March

7. Vision

- 7.1. The proposals attempt to create a coherent street of residential character along Park Lane and to draw together the following elements along an east-west axis
 - The Town Centre,
 - · Canal Square,
 - the Canal,
 - The Timber Yard housing Area and
 - the new Park Lane Neighbourhood Park

to create an attractive neighbourhood of strong visual character and amenity that has clear links to the town centre (see Figure 7.1).


- 7.2. The wooded greenspace to the west of Park Lane will be the basis for a new town park which can be developed over time as the neighbourhood and town centre evolves.
- 7.3. The east-west link is created by extending the visual axis between Weavers Wharf and the Piano Building across the canal to a focal point that will be created in the park. A new bridge will cross the canal springing from Canal Square into an open space in the timber yard housing area and will complete Canal Square as a space which spans the canal.
- 7.4. The aim for street works to Park Lane are as follows:
 - improved pedestrian environment
 - visually more attractive
 - less of a rat-run, and more an access road to a residential area.

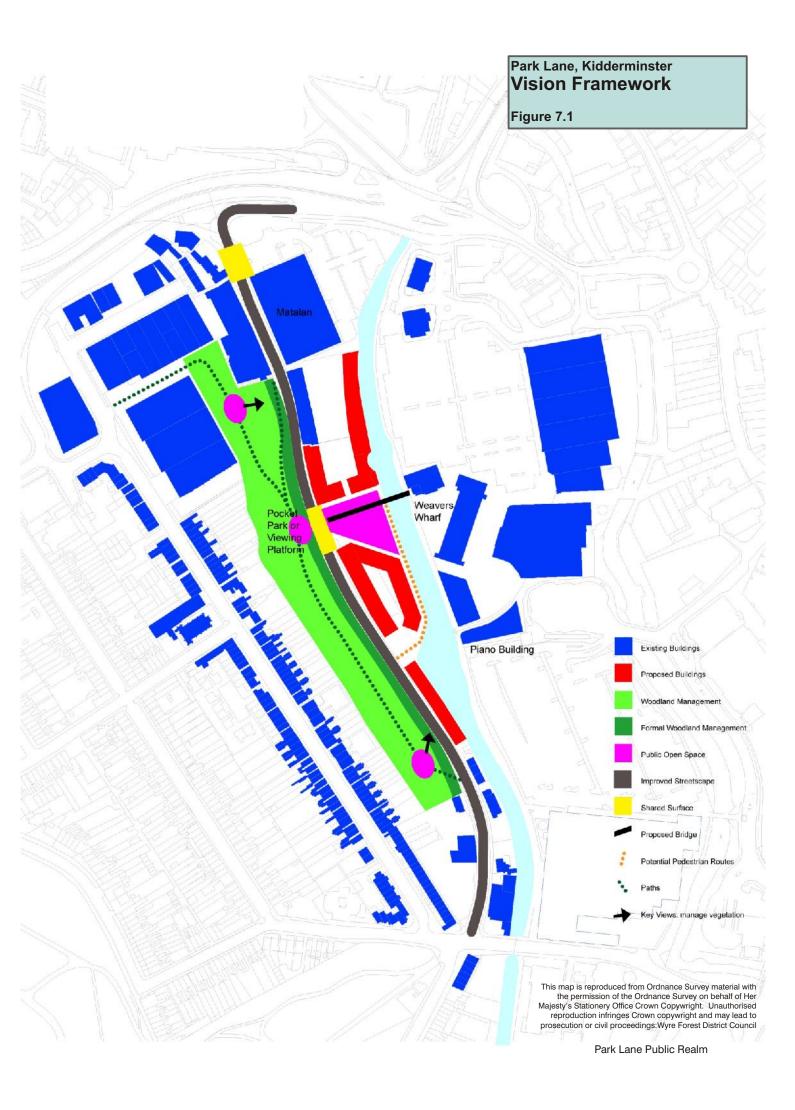


8. Park Design


- 8.1. The key features of the open space are:
 - Views over town centre
 - · Plateau Areas, Steep Slopes and vertical retaining walls and cliffs
 - Woodland
 - Wooded skyline viewed from afar
- 8.2. The new open space would be predominantly woodland and ground flora. A central viewing platform would be created adjacent to Park Lane. Three small glades would be cut out of the woodland on existing plateau areas to create viewing and resting areas. The glades would be locations for seating and artwork.
- 8.3. The viewing platform could be simply functional, or a piece of artwork in its own right, it will be an extension of the small square (linked by steps) spanning Park Lane on the central axis of the timber yard housing area, which is projected through Weavers Wharf from the bus station. The viewing platform would be a location for art work, lighting installations and a seating area. This new feature will help draw people from the town centre towards Canal Square. Conceptual sections and elevations for the pocket park are show in Figure 8.1 and 8.2 showing options with the viewing platform located on the existing terrace and a version with the platform built up from the side of the road to project the focal area toward the populated space. The first option building on existing topography would be the cheaper alternative. The height of the viewing platform must be carefully considered to balance the quality of views without losing a very direct connection with the street to ensure maximum use and safety from natural surveillance. Figure 8.3 show the variety of forms a free-standing viewing platform can take.
- 8.4. The glades will be linked by a series of ramped or sloping paths based on the existing site topography and ramped access in the north-east corner of the area. A third access point will be provided at the point where there is existing pedestrian access to the park opposite the timber yard.
- 8.5. The boundary with Park Lane is crucial and should take on a more formal appearance than the main woodland area. This will be achieved by creating an area of specimen trees set in ground cover planting along the whole length of the greenspace. The specimen trees will be revealed from within the existing woodland by cutting back the poorer and younger specimens. The prime ground flora will be ivy that can be trans-located from throughout the site, this will be highlighted in focal area by ornamental species and bulb planting.
- 8.6. The boundary detail along Park Lane will be a gabion wall as this is a relatively cheap, interesting and dynamic solution. It will be laid with random coursing using a mixture of lengths and heights of basket to disguise any long-term sagging in the wall. Railings will not be necessary unless one of the partial options is adopted below.
- 8.7. There may be an opportunity in the future to create a through route to the higher level Park Street area, around the existing disused steps in the north-west corner. This would be accessed from the adjacent glade.

Viewing Platform built on existing ground levels.

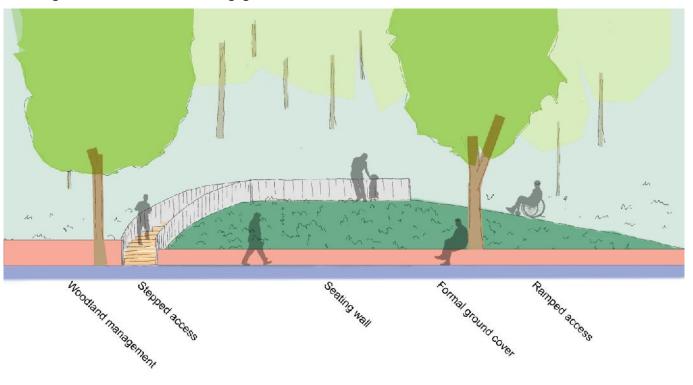

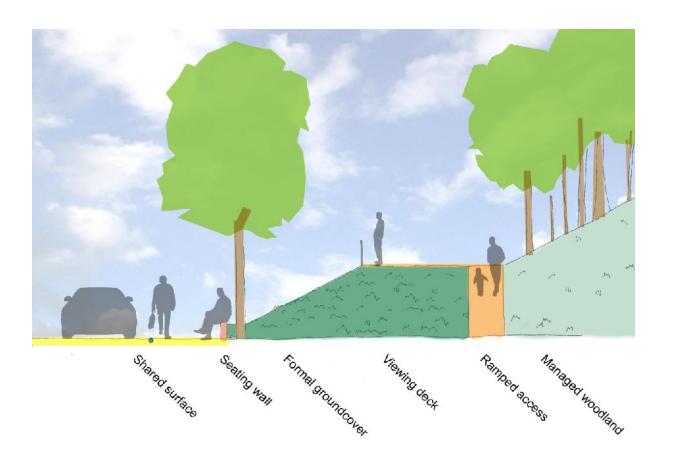

Viewing Platform built up from back of kerb to project this focal area toward the housing area.

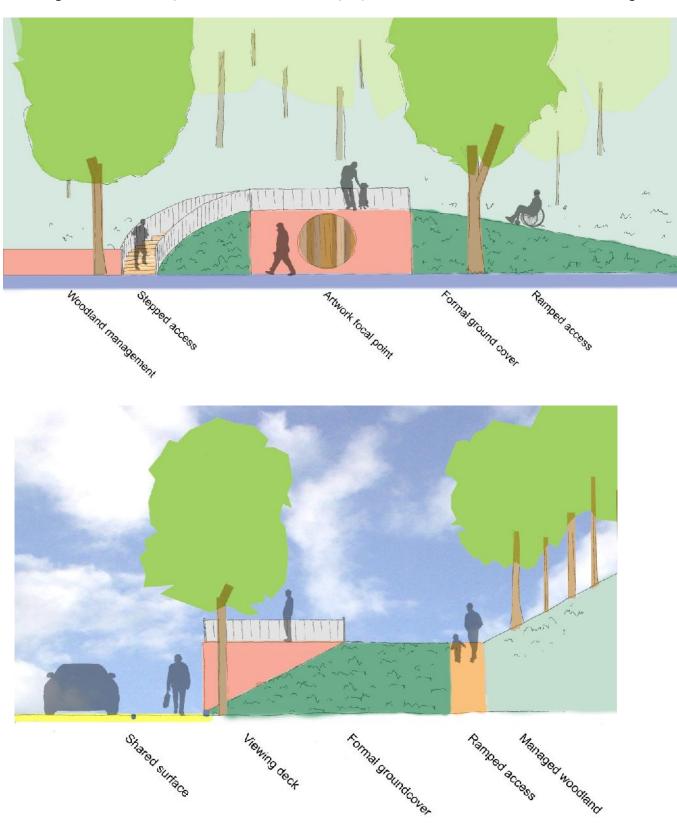




Park Lane, Kidderminster Viewing Platform Examples

Figure 8.3








9. Timber Yard Residential Area and Related Open Space

- 9.1. A central space opening up onto the canal is proposed (see Figure 9), this is a triangular space which mirrors Canal Square and space will form a link between the town centre and the new park. A new footbridge will be the dominant element of the central green space and form its northern boundary. The footbridge will spring from the top of the arched bridge on the eastern tow path next to the Engine House chimney, must clear the water surface by 3m and will descend to meet Park Lane at gradients complying with the Disability Discrimination Act. The bridge must be a light-weight structure that enhances the space and waterscape, examples of footbridges are shown in Figure 9.2.
- 9.2. The land adjacent to the ramped access to the footbridge must be used in a positive way. Land to the south will have a sunny aspect and can be terraced gardens for public access, a feature can be made of what could be a pleasant seating area overlooking water. It may be possible to set a pavilion café or bar beneath the bridge ramp, or into any embankment with a small plaza area, therefore increasing the offer in Canal Square. There should be a hard seating and viewing area adjacent to the canal. The land to the north of the bridges approach ramp will be overshadowed. A positive use of this shady area would be for an access road and car parking overlooked from the adjacent houses/ apartments.
- 9.3. The extended Canal Square will be linked to the new park and viewing point by a square spanning Park Lane. This will be created as a shared surface with, to slow traffic, pinch points at each corner with specimen tree planting or totem markers on the pinch points to denote a space with a different character to the remainder of the highway.
- 9.4. The northern block of housing incorporates the existing warehouse into a perimeter block. The canal–side boundary of the block is shown built up to the waters edge echoing the building line of the existing buildings in this area alternatively small gardens spaces might be introduced similar to those of the existing terraced houses to the south (see photograph below)



- 9.5. The southern perimeter block overlooks the extended Canal Square and is set back from the canal-side by 3m to create a new public path along a short stretch of this bank. This stretch of path extends southward to a small green space which links the canal to Park Lane at the widest point of the canal. The greenspace also provides the vehicular access into the southern perimeter block.
- 9.6. The narrow stretch of land at the southern end of the timber yard can be developed into a single row of 3-storey terraces with internal garages. Back yard spaces over-looking the canal can be provided similar to the adjacent existing terrace.
- 9.7. Sensitive parking proposals are essential to the successful development of this area, no one form of parking should dominate and rear parking courts should not promote the use of the back door as the main entrance to developments. Perimeter block must be big enough to generously accommodate a well designed communal landscape with courtyard parking and a mix of and private gardens to ensure the courtyard is not dominated by a sea of cars. The north-south orientation of these blocks will enable significant sunlight penetration to the courtyards, generally car parking will be concentrated in the southern part of courts. Internal garages should be used where possible in houses.
- 9.8. On-street parking might be proposed as shown in Figure 9.1, in places, this may require a developer to cut into the adjacent parkland, rebuilding the boundary retaining wall, this should only be considered where it can be done sensitively.

- 9.9. The main message with parking is variety in style to ensure that one form does not dominate, the following mix might be considered
 - 10% External garages
 - 30% On-street
 - 30% Courtyard
 - 30% Internal garages
- 9.10. A few garage units should also be considered in place of houses or apartments in the perimeter blocks and terrace. Generally garages should be set on the southern side of perimeter blocks to increase the sunlight getting into the courtyard.

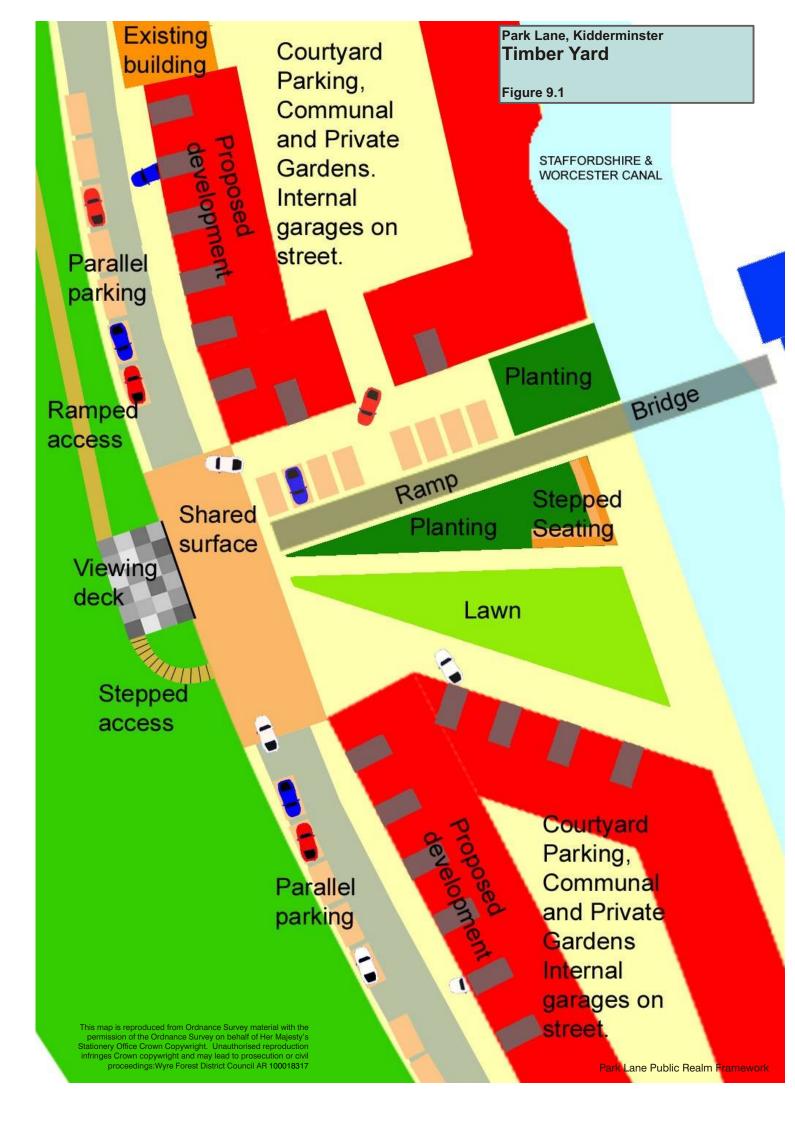

Park Lane, Kidderminster Bridge Examples

Figure 9.2











Park Lane Public Realm Framework

10. Northern Entrance to Park Lane and the Rock Works

10.1. Presently cars come down the slip road from the ring road and carry that speed and bypass / rat run mentality on into Park Lane which results in excessive speeds on this straight road. The proposals create a new square to transform the character of the area (see Figure 10.1). The new square is projected from the existing quality commercial buildings adjacent to the Rock Works and is a shared surface accessed from a pinched slipway with a tightened curve leading to it. Bollard sockets can be set into the square so that, if necessary, a vehicular route can be defined through the space, but the aim would be to avoid segregation of traffic and pedestrians.




New Gateway Square Location

- 10.2. There is the opportunity to formalise the parking on the eastern side of Park Lane in front of the Rock Works with up to 7 parallel spaces. These may be associated with the a Rock Works development and augment parking in the under croft garages in the northern of the two Rock Works building. If further parking is required for Rock Works, the existing commercial parking area next to the new could share its parking which is used predominantly in the day time and on week days, if a financial arrangement could be made.
- 10.3. Pinch points would define each end of the parking area and slow traffic entering the square from the south.

Park Lane, Kidderminster

Rock Works Square

Figure 10.1

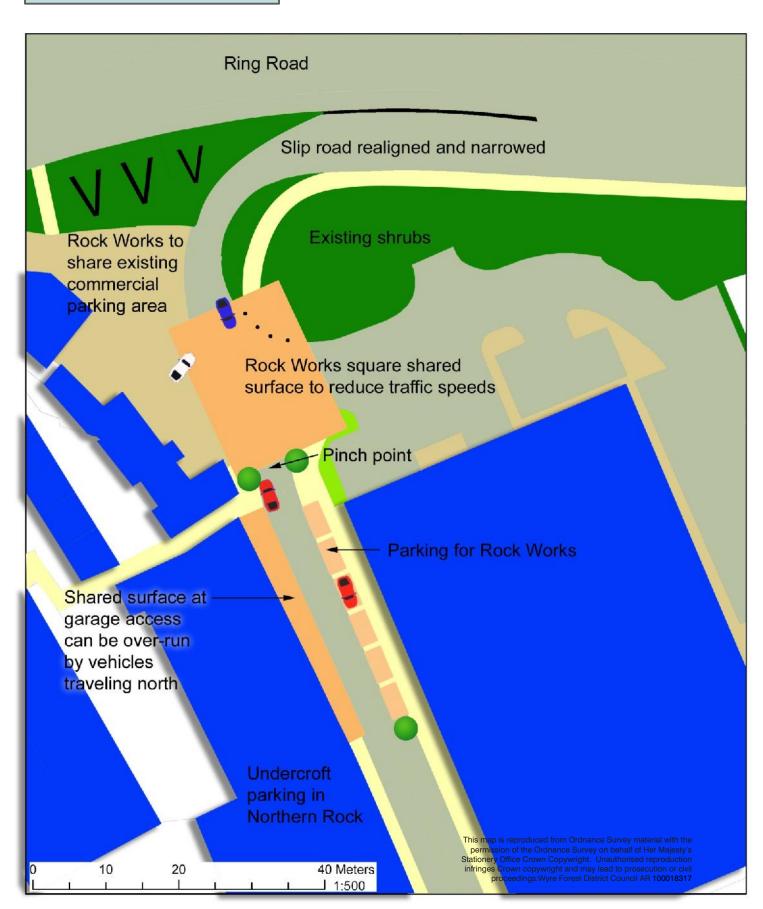

11. Street Layout

- 11.1. Proposals are set our in previous sections for shared spaces spanning Park Lane at the northern end of Park Lane and in its central section, otherwise, there are no proposals for changing the alignment of the pavements or roadways. The footpath on the western side of Park Lane only extends along the southern half of Park Lane (see Photo 6.9). Through the construction of the Neighbourhood Park, the retaining wall on this side could be set back to accommodate a new pavement up as far as the Rock Works.
- 11.2. The new shared spaces will be surfaced in a high quality block (stone or concrete), the remainder of the street and pavements will be surfaced in tarmac. A quality kerb and lighting can be used to draw the character of the new spaces along the length of the street but the major change in character will come from the new residential buildings on the Timber Yard and from the improved boundary treatment of the Neighbourhood Park. Good quality concrete flag paving will reinforce the domestic scale envisaged.
- 11.3. New lamp posts, lower than traditional highway lighting, with a pedestrian character, set at the back of kerb will create enclosure in the street that will encourage drivers to reduce their speed.

12. Design Palette

12.1. A design palette has been developed of attractive, robust materials and products as follows:

Park

- Paving Tar Spray and Chip with timber board edging on tarmac
- Lighting (viewing Area only) Motis Blade Clad Lantern and Motis Light Stack (4 metre) from Woodhouse
- Bench Bespoke fair faced concrete with wooden slats.
- Bollard Woodscape SPF Profile 250mm sqr, x 500mm long
- Bin Broxap Pierhead Standard BX2311 in dark grey

Street

- Surfacing Tarmac Road, Dark Grey Granite Kerb, Charcon Ecopave Slabs on Pavement
- Lighting Phillips Metronomis Cambridge, post-mounted
- Bollard Broxap Pierhead Tall in dark grey
- Bin Broxap Pierhead Standard BX2311 in dark grey

Shared Surface, Central Open Space and Housing Area

- Surfacing Light/Dark Grey Granite Blocks mix
- Lighting Motis Blade Clad Lantern and Motis Light Stack (4 metre) from Woodhouse
- Bench Escofet Tramet bench and seat (i.e. with back rest)
- Bollards Broxap Pierhead Tall in dark grey
- Bin Broxap Pierhead Standard BX2311 in dark grey

Images of these products are shown on the following page.

Park Lane, Kidderminster **Palette**

Figure 12.1







PARK

Paving - Tar Spray and Chip with timber board edging on tarmac
Lighting (viewing Area only) - Motis Blade Clad Lattern and
Motis Light Stack (4 metre) from Woodhouse

Bin - Broxap Pierhead Standard BX2311 in dark grey Bollard - Woodscape SPF Profile 250mm sqr, x 500mm long Bench - Bespoke fair faced concrete with wooden slats.




Surfacing - Tarmac Road, Dark Grey Granite Kerb, Charcon Ecopave Slabs on Pavement Lighting - Phillips Metronomis Cambridge, post-mounted Bin - Broxap Pierhead Standard BX2311 in dark grey Bollard - Broxap Pierhead Tall in dark grey











SHARED SURFACE, CENTRAL OPEN SPACE AND HOUSING AREA

Surfacing - Light/Dark Grey Granite Blocks mix
Lighting - Motis Blade Clad Lattern and
Motis Light Stack (4 metre) from Woodhouse
Bin - Broxap Pierhead Standard BX2311 in dark grey
Bollards - Broxap Pierhead Tall in dark grey
Bench - Escofet Tramet

- 12.2. The surfacing proposed in the park area is a basic, but attractive tar spray and chip on the flexible macadam base. Tarmac is also proposed for Park Lane, but with a mix of light and dark grey granite setts used on shared surfaces which will be focal areas. A similar mix is proposed for the central open space on the park. Pavements on Park Lane are shown as the Charcon Ecopave. An attractive concrete paver that minimises energy use in its production and maximises use of recycled products.
- 12.3. Road lighting is set out as the Phillips Metronomis Cambridge luminaire. This evokes an historic form of lighting but deliver it in a contemporary fitting. At focal areas: the shared surface and the central open space, the Woodhouse Motis Blade post top lamp is used in conjunction with the Motis Light Stack (4 metre) which is basically an oversized bollard lamp. These will help create a sleek contemporary night-time environment. These fittings are also proposed for the focal area of the park to create a strong link to the urban spaces.
- 12.4. Bins and bollards are from the robust Broxap Pier Head range which have an attractive contemporary look. Wooden bollards are proposed in the park area. The benches put forward have a 'chunky' wood look to them that can be seen to derive from the design language of the canals but still has a contemporary look. In the park area the wood is supported by a solid concrete base to reduce the risk of arson.

13. Implementation

- 13.1. It is essential that the issues relating to the Wooded Greenspace are better understood so that more accurate cost estimates can be produced for the construction of the Neighbourhood Park. The following surveys should be undertaken:
 - Topographic Survey
 - Structural Surveys of the numerous retaining walls
 - Ground Contamination
 - Tree Survey
 - Phase 1 Habitat Survey
 - Bat Survey

Park Phasing Options

- 13.2. It may not be possible to implement all of the proposals for the new Neighbourhood Park in one go, so a number of options are set out below that would enable a phased approach to delivery of the park. The options discussed are:
 - Security
 - Safety (two alternate options)
 - Free-standing Viewing Platform
 - Pocket Park
 - Neighbourhood Park

Security

- 13.3. This option improves the security of the site by upgrading or replacing the fencing along the length of Park Lane. No public access to the open space is provided.
 - Budget Option Paint palisade fencing black
 - Mid-range Option Plastic coated mesh fencing
 - Enhanced Option Powder coated black Mild steel railings
 - Remove fly-tipping

Safety 1

- 13.4. This option builds a new retaining wall along the length of Park Lane to create a quality edge. No public access to the open space is provided.
 - New brick retaining with sandstone coping or rock-filled gabion wall
 - Fencing optional
 - Remove fly-tipping

Safety 2

- 13.5. This option builds a new retaining wall along the length of Park Lane to create a quality edge. No public access to the open space is provided.
 - New brick retaining with sandstone coping or rock-filled gabion wall

- · Rebuild internal retaining walls
- Fencing optional
- Remove fly-tipping

Free-standing Viewing Platform

- 13.6. A feature viewing platform could be constructed as a free-standing element that would require minimum works to the existing greenspace but still create an exciting new element in the town centre. This option would cause minimum disturbance to any existing habitat (and could provide new bat habitat) and will only require limited disturbance of the existing ground which may be a particular benefit if there are contamination issues. A viewing platform could be constructed on stilts with stepped and ramped access. The platform could be simply constructed from galvanised steel, or as an elaborate sculptural piece in its own right.
- 13.7. The Viewing Platform option could be combined with one of the safety or security options.

Pocket Park

- 13.8. Facilitate access to a small focal area of the park. The open space is very long, this means that a lot of money has to be spent on boundary treatments, whether it be fencing or the retaining wall. This option enables money to be concentrated in a small area to make a significant difference at a key point. Includes:
 - · Create viewing platform
 - Clear brambles
 - Tran-locate ground flora
 - limited tree removal
 - limited seating
 - lighting
 - steps
 - artwork
 - removal of fly-tipping
 - construction of viewing platform
 - construction of the relevant stretch of retaining wall.
- 13.9. The Pocket Park option could be combined with one of the safety or security options.

Neighbourhood Park

- 13.10. This option delivers the entire concept for the park area, it includes:
 - Site Clearance
 - Removal of Fly tipping
 - Significant removal of trees
 - Set-back retaining wall on north half of the western side of Park Lane to create pavement
 - Rebuild retaining walls on Park Lane
 - Rebuild internal retaining walls
 - lighting
 - steps
 - paths
 - street furniture
 - construction of viewing platform
 - create 3 glades (turf amenity grass area with timber board edging)

- Translocation of ground flora from amenity grass areas
- Artwork
- No fencing work is required in this option

Cost Estimates

- 13.11. It should be noted that these are budget figures only, provided by the respective suppliers or manufacturers. The rates used are current at this time and do not include any supplier discount. No costs are included relating to the provision of electrical supplies to streetlamps. Exclusions are as follows:-
 - Preliminaries
 - Statutory Undertakings
 - Design, Planning and Local Authority, Building Control and other Professional Fees
 - Contingencies
 - Tender Price Inflation
 - VAT
- 13.12. Cost Estimates are shown in Appendix A, in the absence of structural and topographic surveys, assumptions relating to the length, height and structural integrity of the retaining walls are made. Lengths and heights of walls are estimated from the audits undertaken and from ordnance survey data. A cost is allowed for replacing all walls as many of them appear to have structural problems. No allowance is made for any temporary supporting work for retaining walls. No allowance is included for remediation of any ground contamination.
- 13.13. Once more basic information is available from the surveys, more detailed cost estimates can be developed relating to the range of options outlined above particularly in respect to the renovation of retaining walls and any ground contamination issues.
- 13.14. The following table contains a summary of the estimates:-

| Project | Cost Estimate | |
|---|-------------------------------|--|
| Park Lane Boundary Railing/Walling | Range from £20,000 to £88,000 | |
| Park Lane Greenspace (excluding pocket park area and boundary detail itemized seperately) | £290,000 | |
| Pocket Park | £110,000 | |
| Timber Yard Public Space | £370,000 | |
| Park Lane Street Works | £400,000 | |
| Rock Works Square Shared Surface | £75,000 | |
| Timber Yard Square Shared Surface | £60,000 | |

Costs Estimates According to Park Phasing Options

13.15. Section 13 sets out phasing options for the park. The cost estimates produced can be amalgamated to produce estimates for each of the Phasing Option:-

| Project / Phase | Cost Estimate |
|--|---------------|
| Security (each includes £15,000 for removal of fly-tipping) | |
| Budget Option – Paint Palisade Fence Black | £35,000 |
| Mid-range Option – Plastic coated mesh fencing | £48,000 |
| Enhanced Option – Powder coated black mild steel railings | £65,000 |
| Safety 1 (includes £15,000 for removal of fly-tipping, no fencing included in cost estimates) | |
| Brick Boundary Wall with sandstone coping | £105,000 |
| Alternate gabion wall | £95,000 |
| Safety 2(includes £15,000 for removal of fly-tipping, no fencing included in cost estimates, gabion boundary wall assumed) | £235,000 |
| Pocket Park | £110,000 |
| Neighbourhood Park (including pocket park elements) | £400,000 |

MANAGEMENT

- 13.16. It is essential to consider the management of the park, in all its phases, from the outset. The safety and security options would suit a low-cost naturalistic form of management to maximise wildlife value and promote screening of any fencing with naturally occurring ivy and other vegetation.
- 13.17. The Neighbourhood Park option would require a formal management regime to a 10m wide band along the front of the greenspace, with a more naturalistic regime to the rear.
- 13.18. Once fly-tipping has been cleared up, the residents on Park Street must be consulted on how to minimise its recurrence. A combination of enforcement and education relating to wildlife value should be considered along with a redefining of the rear boundary of properties with remedial fence works.

Appendix A – Cost Estimates

PARK LANE GREENSPACE BOUNDARY

| ltem | Qty | Unit | Rate | Total | Option 1 |
|--|-----|------|--------|--------|-------------|
| Green space fencing and Walling | | | | | |
| Park Lane Boundary Fencing | | | | | |
| Paint palisade fencing black - Budget Option | 330 | m | 60.00 | 19,800 | |
| Plastic coated mesh fencing; 1.80m high - Mid range option | 330 | m | 100.00 | 33,000 | |
| Powder coated black mild steel railings; 1.80m high - Enhanced option | 330 | m | 150.00 | 49,500 | |
| | | | | 0 | |
| Park Lane Boundary Walling | | | | 0 | |
| Retaining brick wall; sand stone coping (1m high) | 120 | m | 300.00 | | 36,000 |
| Retaining brick wall; sand stone coping (1.5m high) | 130 | m | 400.00 | | 52,000 |
| | | | | 0 | |
| Gabion retaining wall with structured loose filled rock - Alternative (1m & 1.5m high) | 315 | m² | 250.00 | 78,750 | |
| Fencing and Walling Total Cost | | | | N/A | 88,000 |

Assumes retaining walls reconstruction does not need temporary supporting works

PARK LANE GREENSPACE

| Item | Qty | Unit | Rate | Total |
|---|--------|------------|-----------|---------|
| | ٦., | 0 | 110.00 | |
| Site Clearance (assumed disposal to tip) | | | | |
| | | | | |
| Clear Bramble throughout site | 12,800 | m² | 2.00 | 25,600 |
| Clear 80% trees along 10m corridor | 3,200 | m² | 5.00 | 16,000 |
| Clear 30% of trees in remainder of site | 9,600 | m² | 3.00 | 28,800 |
| Remove fly tipping (including disposal) | 1,500 | m² | 10.00 | 15,000 |
| Clear 2 glades and Turf with amenity grass | 600 | m² | 8.00 | 4,800 |
| | | | | |
| Site Clearance Total Cost | | | | 90,200 |
| | | | | |
| Internal retaining walls | | | | |
| Brick retaining with precast conc. Coping (North end) | 375 | m² | 350.00 | 131,250 |
| Rebuild rising retaining wall in reinforced conc.; 0.5m - 6.00m (South end) | 20 | m | 500.00 | 10,000 |
| | | | | |
| Fencing and Walling Total Cost | | | | 141,250 |
| Footpaths and Kerbs | 1 | | | |
| Tar spray and chip footpath, 2m wide with timber | | | | |
| board edge | 400 | m | 70.00 | 28,000 |
| | | | | |
| Footpaths and Kerbs Total Cost | | | | 28,000 |
| | | | | |
| Landscaping | | | | |
| Turf with amenity grass | 600 | m² | 15.00 | 9,000 |
| | | | | |
| Landscaping Total Cost | | | | 9,000 |
| Site Furniture | | | | |
| Bench - Concrete base with timber slats | 4 | nr | 2,000.00 | 8,000 |
| Artwork | 1 | nr item | 10.000.00 | 10.000 |
| Altwork | ' | ILCIII | 10,000.00 | 10,000 |
| Site Furniture Total Cost | | | | 18,000 |
| | | | | |
| SUMMARY | | | | |
| Site Clearance Total Cost | | | | 90,200 |
| Fencing and Walling Total Cost | | | | 141,250 |
| Footpaths and Kerbs Total Cost | | | | 28,000 |
| Landscaping Total Cost | | | | 9,000 |
| Site Furniture Total Cost | | | | 18,000 |
| Doos not include cost for the Dark Lane houndary | | | | 286,450 |

Does not include cost for the Park Lane boundary wall/railings. Assumes retaining walls reconstruction does not need temporary supporting works

POCKET PARK

| Item | Qty | Unit | Rate | Total |
|---|-----|------|----------|--------|
| Site Clearance (assumed disposal to tip) | | | | |
| One Ground (accumou disposar to tip) | | | | |
| Viewing Area | | | | |
| Clear Vegetation | 750 | m² | 1.00 | 750 |
| Site Clearance Total Cost | | | | 750 |
| Fencing and Walling | | | | |
| No allowance made | | | | |
| Fencing and Walling Total Cost | | | | 0 |
| Groundwork's | | | | |
| Excavating to reduce levels for pedestrian | 400 | m3 | F 00 | 050 |
| (assumed 400mm deep) Filling to make up levels for footpath - Hardcore | 190 | m³ | 5.00 | 950 |
| 150mm | 71 | m³ | 30.00 | 2,138 |
| Compacting bottoms of excavations | 475 | m² | 0.50 | 238 |
| Compacting bottoms of filling | 475 | m² | 0.50 | 238 |
| Disposal of excavated material | 190 | m³ | 27.00 | 5,130 |
| Groundworks Total Cost | | | | 8,693 |
| Footpaths and Kerbs | 1 | | | |
| Granit Grey Blocks 150x300x50mm deep | 475 | m2 | 100.00 | 47,500 |
| Ramped access; tar spray and chip with timber board edging; 2.00m wide | 100 | m | 70.00 | 7,000 |
| | | | | , |
| Footpaths and Kerbs Total Cost | | | | 54,500 |
| Landscaping | | | | |
| | | | | |
| Shrub planting | 275 | m² | 25.00 | 6,875 |
| Landscaping Total Cost | | | | 6,875 |
| | | | | |
| Park Lane Boundary Walling | | | | |
| Gabion retaining wall with structured loose filled rock - Alternative (20mx2m high) | 40 | m² | 250.00 | 10,000 |
| Fencing and Walling Total Cost | | | | 10,000 |
| | | | | |
| Access | | | | |
| Stepped access; precast conc. steps; 130mm risers; 1m going; total height 2.00m; going in tar | | | | |
| spray and chip | 1 | nr | 5,000.00 | 5,000 |

| Stainless steel handrail to steps | 15 | m | 150.00 | 2,250 |
|--|----|----|-----------|--------|
| | | | | |
| Access Total Cost | | | | 7,250 |
| | | | | |
| Site Furniture | | | | |
| | | | | |
| Bin - Broxap Pierhead standard BX2311; dark grey | 2 | nr | 1,000.00 | 2,000 |
| Seat - Escofet Tramet | 4 | nr | 880.00 | 3,520 |
| Lighting - Motis blade clad lantern | 5 | nr | 1,000.00 | 5,000 |
| Lighting - Motis Light stack (4m) | 5 | nr | 800.00 | 4,000 |
| Artwork (undefined Provisional Sum) | 1 | nr | 10,000.00 | 10,000 |
| | | | | |
| Site Furniture Total Cost | | | | 24,520 |

| SUMMARY | | |
|--------------------------------|--|---------|
| Site Clearance Total Cost | | 750 |
| Groundworks Total Cost | | 8,693 |
| Footpaths and Kerbs Total Cost | | 54,500 |
| Landscaping Total Cost | | 6,875 |
| Fencing and Walling Total Cost | | 10,000 |
| Access Total Cost | | 7,250 |
| Site Furniture Total Cost | | 24,520 |
| TOTAL | | 112,588 |

TIMBER YARD PUBLIC SPACE

| ltem | Qty | Unit | Rate | Total |
|--|-----|------|--------|---------|
| | | | | |
| Site Clearance (assumed disposal to tip) | | | | |
| No allowance for site clearance | | | | |
| Site Clearance Total Cost | | | | 0 |
| | | | | |
| Retaining Walls | | | | |
| No allowance for works to canalside walls | | | | |
| Fencing and Walling Total Cost | | | | 0 |
| | | | | |
| Groundwork's | | | | |
| | | | | |
| Excavating to reduce levels for footpath (assumed 400mm deep) | 190 | m³ | 5.00 | 950 |
| Excavating to reduce levels for roadway (assumed 450mm deep) | 113 | m³ | 5.00 | 563 |
| Filling to make up levels for footpath - Hardcore 150mm | 109 | m³ | 30.00 | 3,263 |
| Compacting bottoms of excavations | 725 | m² | 0.50 | 363 |
| Compacting bottoms of filling | 725 | m² | 0.50 | 363 |
| Disposal of excavated material | 303 | m³ | 27.00 | 8,168 |
| | | | | |
| Groundworks Total Cost | | | | 13,668 |
| Factuating and Marks | 1 | j i | 1 | |
| Footpaths and Kerbs | | | | |
| Type 1 sub-base (assumed 200mm) | 95 | m³ | 30.00 | 2,850 |
| Grey granite blocks; 150x300x50mm (pedestrian) | 475 | m² | 80.00 | 38,000 |
| grand areas of the second of t | | | | , |
| Footpaths and Kerbs Total Cost | | | | 40,850 |
| | | | | |
| Road surfacings, 'shared surfacings' and | | | | |
| markings | | | | |
| Type 1 sub-base (assumed 200mm) | 50 | m³ | 30.00 | 1,500 |
| Grey granite blocks; 150x300x100mm (vehicular) | 250 | m² | 100.00 | 25,000 |
| , g (| | | | |
| Road surfacings, 'shared surfacings' and | | | | |
| markings Total Cost | | | | 26,500 |
| Landscaping | | | | |
| | | | | |
| Shrub planting | 175 | m² | 50.00 | 8,750 |
| Lawn | 300 | m² | 15.00 | 4,500 |
| Semi mature trees | 9 | nr | 550.00 | 4,950 |
| Landscaping Total Cost | | | | 18,200 |
| | | | | . 0,200 |

| Access | | | | |
|--|----|----|------------|---------|
| | | | | |
| High Quality Bridge - 45m embanked ramp; 3m wide one side; 14m span; 3m clearance (wide range of costs!) | 1 | nr | 250,000.00 | 250,000 |
| • | | | | |
| Access Total Cost | | | | 250,000 |
| | | | | |
| Site Furniture | | | | |
| | | | | |
| Bench - Escofet Tramet | 3 | nr | 1,650.00 | 4,950 |
| Bollards - Broxap Pierhaed Tall; dark grey | 10 | nr | 450.00 | 4,500 |
| Bin - Broxap Pierhead standard BX2311; dark grey | 2 | nr | 1,000.00 | 2,000 |
| Lighting - Motis blade clad lantern | 5 | nr | 1,000.00 | 5,000 |
| Lighting - Motis blade clad stack | 5 | nr | 800.00 | 4,000 |
| | | | | |
| Site Furniture Total Cost | | | | 20,450 |

| SUMMARY | | |
|--|--|---------|
| Groundworks Total Cost | | 13,668 |
| Footpaths and Kerbs Total Cost | | 40,850 |
| Road surfacings, 'shared surfacings' and markings Total Cost | | 26,500 |
| Landscaping Total Cost | | 18,200 |
| Access Total Cost | | 250,000 |
| Site Furniture Total Cost | | 20,450 |
| TOTAL | | 369,668 |

No allowance for site clearance or works to canal walls

PARK LANE STREETWORKS

| Item | Qty | Unit | Rate | Total |
|--|-------|------|-------|---------|
| | | | | |
| Site Clearance (assumed disposal to tip) | | | | |
| Remove Existing Street Lamps | 30 | nr | 50.00 | 1,500 |
| | | | | |
| Site Clearance Total Cost | | | | 1,500 |
| Groundwork's | | | | |
| Excavating to reduce levels for roadway (assumed 450mm deep) | 225 | m³ | 5.00 | 1,125 |
| Filling to make up levels for footpath - Hardcore 150mm | 75 | m³ | 30.00 | 2,250 |
| Compacting bottoms of excavations | 500 | m² | 0.50 | 250 |
| Compacting bottoms of filling | 500 | m² | 0.50 | 250 |
| Disposal of excavated material | 225 | m³ | 27.00 | 6,075 |
| | | | | |
| Groundworks Total Cost | | | | 9,950 |
| Footpaths and Kerbs | | | | |
| • | | | | |
| Type 1 sub-base (assumed 200mm) | 376 | m³ | 30.00 | 11,280 |
| Charcon Ecopave slabs | 1,880 | m² | 80.00 | 150,400 |
| Dark grey granite kerbs | 940 | m | 80.00 | 75,200 |
| Footpaths and Kerbs Total Cost | | | | 236,880 |
| Road surfacings | | | | |

| Footpaths and Kerbs | | | | |
|--|-------|----|----------|---------|
| | | | | |
| Type 1 sub-base (assumed 200mm) | 376 | m³ | 30.00 | 11,280 |
| Charcon Ecopave slabs | 1,880 | m² | 80.00 | 150,400 |
| Dark grey granite kerbs | 940 | m | 80.00 | 75,200 |
| | | | | |
| Footpaths and Kerbs Total Cost | | | | 236,880 |
| | | | | |
| Road surfacings | | | | |
| Preparation of existing, surface coat 35mm macadam to road way | 3,290 | m² | 15.00 | 49,350 |
| Lay 35mm of top coat | 3,290 | m² | 7.00 | 23,030 |
| | | | | |
| Road surfacings | | | | 72,380 |
| Site Furniture | | | | |
| Park lane street works | | | | |
| Lighting - Philips Metronomis Cambridge; post mounted | 60 | nr | 1,350.00 | 81,000 |
| Site Furniture Total Cost | | | | 81,000 |

| SUMMARY | | |
|--------------------------------|--|---------|
| Site Clearance Total Cost | | 1,500 |
| Groundworks Total Cost | | 9,950 |
| Footpaths and Kerbs Total Cost | | 236,880 |

| Road surfacings | | 72,380 |
|---------------------------|--|---------|
| Site Furniture Total Cost | | 81,000 |
| Total | | 401,710 |

TIMBER YARD SQUARE SHARED SURFACE

| Groundwork's Excavating to reduce levels for roadway (assumed 450mm deep) Filling to make up levels for footpath - Hardcore | 173 | | | |
|---|-----|----|----------|----------------|
| 450mm deep) | 173 | | | |
| 450mm deep) | 173 | | | |
| Filling to make up levels for footpath - Hardcore | | m³ | 5.00 | 866 |
| 150mm | 58 | m³ | 30.00 | 1,733 |
| Compacting bottoms of excavations | 385 | m² | 0.50 | 193 |
| Compacting bottoms of filling | 385 | m² | 0.50 | 193 |
| Disposal of excavated material | 173 | m³ | 27.00 | 4,671 |
| | | | | |
| Groundworks Total Cost | | | | 7,655 |
| Road surfacings, 'shared surfacings' and | | | | |
| markings | | | | |
| At timber yard | 1 | | | |
| Type 1 sub-base (assumed 200mm) | 77 | m³ | 30.00 | 2,310 |
| Grey granite blocks; 150x300x100mm (vehicular) | 385 | m² | 100.00 | 38,500 |
| Road surfacings, 'shared surfacings' and markings Total Cost | | | | 40,810 |
| Landscaping | | | | |
| Timber your control public conce | | | | |
| Timber yard central public space Semi mature trees | 6 | nr | 550.00 | 2 200 |
| Semi mature trees | 0 | nr | 550.00 | 3,300 |
| Landscaping Total Cost | | | | 3,300 |
| Site Furniture | | | | _ |
| Seat - Escofet Tramet | 2 | nr | 880.00 | 1,760 |
| Lighting - Motis blade clad lantern | 8 | nr | 1,000.00 | 8,000 |
| Site Furniture Total Cost | | | | 9,760 |
| SUMMARY | | | | |
| Groundworks Total Cost | | | | 7,655 |
| Road surfacings, 'shared surfacings' and markings | | | | |
| Total Cost | | | | 40,810 |
| Landscaping Total Cost Site Furniture Total Cost | | | | 3,300 9,760 |
| TOTAL | | | | 61,525 |

ROCK WORKS SQUARE SHARED SURFACE

| Item | Qty | Unit | Rate | Total |
|--|-----|------|----------|--------|
| Groundwork's | | | | |
| Glouildwork's | | | | |
| Excavating to reduce levels for pedestrian (assumed | | | | |
| 400mm deep) | 150 | m³ | 5.00 | 750 |
| Filling to make up levels for footpath - Hardcore 150mm | 71 | m³ | 30.00 | 2,138 |
| Compacting bottoms of excavations | 500 | m² | 0.50 | 250 |
| Compacting bottoms of filling | 500 | m² | 0.50 | 250 |
| Disposal of excavated material | 150 | m³ | 27.00 | 4,050 |
| | | | | |
| Groundworks Total Cost | | | | 7,438 |
| Road surfacings, 'shared surfacings' and | | | | |
| markings | | | | |
| | | _ | | |
| Type 1 sub-base (assumed 200mm) | 100 | m³ | 30.00 | 3,000 |
| Grey granite blocks; 150x300x100mm (vehicular) | 500 | m² | 100.00 | 50,000 |
| Road surfacings, 'shared surfacings' and | | | | |
| markings Total Cost | | | | 53,000 |
| Landscaping | | | | |
| | | | | |
| Semi mature tress | 4 | nr | 550.00 | 2,200 |
| Landscaping Total Cost | | | | 2,200 |
| | | | | _, |
| Site Furniture | | | | |
| 0.1.5.1.7.1 | - | | 000.00 | 0.040 |
| Seat - Escofet Tramet | 3 | nr | 880.00 | 2,640 |
| Lighting - Motis blade clad lantern | 9 | nr | 1,000.00 | 9,000 |
| Site Furniture Total Cost | | | | 11,640 |
| | | | | |
| Summary | | | | |
| Groundworks Total Cost | | | | 7,438 |
| Road surfacings, 'shared surfacings' and markings Total Cost | | | | 53,000 |
| Landscaping Total Cost | | | | 2,200 |
| Site Furniture Total Cost | | | | 11,640 |
| TOTAL | | | | 74,278 |

taylor young ty

chadsworth house wilmslow road handforth cheshire sk9 3hp

t.01625 542 200 f.01625 542 250

urban@tayloryoung.co.uk www.tayloryoung.co.uk

architecture
graphics
healthcare planning
interior design
landscape architecture
regeneration
town planning
urban design







INVESTOR IN PEOPLE